




Chiller CH05D

Air-cooled chiller with 50 kW cooling capacity, complete with internal water pump and buffer tank. This low-energy low-noise machine is ready for use. The machine is mounted in a robust frame with a shock-resistant grid for condenser protection and can be moved easily with a forklift or crane.

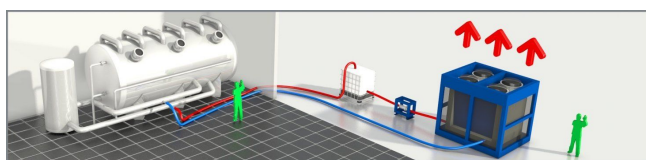

Standard accessories CH05D



Robust frame



Water connection




Electrical power connection (A)

Optional accessories CH05D




SMS alarm



Water supply connection



Pumps



Heat exchanger



Extension power cables



Water hoses



Buffertank



3-way valve



Diesel power generator

Technical specifications CH05D

Cooling capacity ¹	55.3 kW
Power consumption	24 kW
Current (nominal)	43 A
Power connection	63 A CEE
Recommended fuses	63 A
Phases	3 + N + E
Internal pump	Yes
Water connection	2" Bauer
Maximum working pressure	4 bar
Nominal pressure drop	30 kPa
Length	2800 mm
Width	1200 mm
Height	2050 mm
Weight	1006 kg
Sound level (at 10 m)	45 dB(A)

¹ Conform specifications (cooling: water 12 °C/7 °C, air 35 °C)