





Airhandler LU02L

Water-cooled ventilation unit with a 27 kW cooling capacity, fitted with ventilation control. The frequency controlled unit has a defrost device, making it suitable for low-temperature applications as well. This system can also be used as a heater (capacity: 14 kW). The low temp airhandler is ready for use and easy to install with its quick-connectors. The unit is easy to move with a pallet cart or forklift.

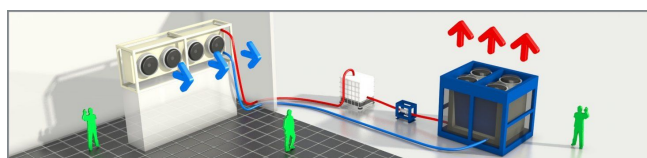

Standard accessories LU02L

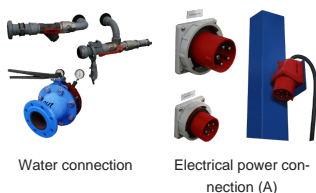

Water connection

Electrical power connection (A)

Optional accessories LU02L



Water supply connection

Pumps

Extension power cables

Water hoses

Buffertank

Airhoses

Diesel power generator

Technical specifications LU02L

Cooling capacity ¹	27 kW
Current (nominal)	6.4 A
Capacity steps	Frequency controlled
Max. air flow	26000 m ³ /h
External (Air) pressure	130 Pa
Power connection	16/32 A CEE
Voltage	400 V
Recommended fuses	16/32 A
Phases	3 + E
Water connection	2? Bauer
Length	2940 mm
Width	1200 mm
Height	1770 mm
Weight	800 kg
Sound level (at 10 m)	65 dB(A)

¹ Cooling: Water-Glycol 30% -10°C/-6°C, air 0° 60% RV