

## Chiller CZ02

Air-cooled chiller with 50 kW cooling capacity. This low-energy low-noise machine is ready for use. The machine is mounted in a robust frame with a shock-resistant grid for condenser protection and can be moved easily with a fork-lift or crane.

### Standard accessories CZ02




Robust frame

Water connection

Electrical power connection (A)

### Optional accessories CZ02

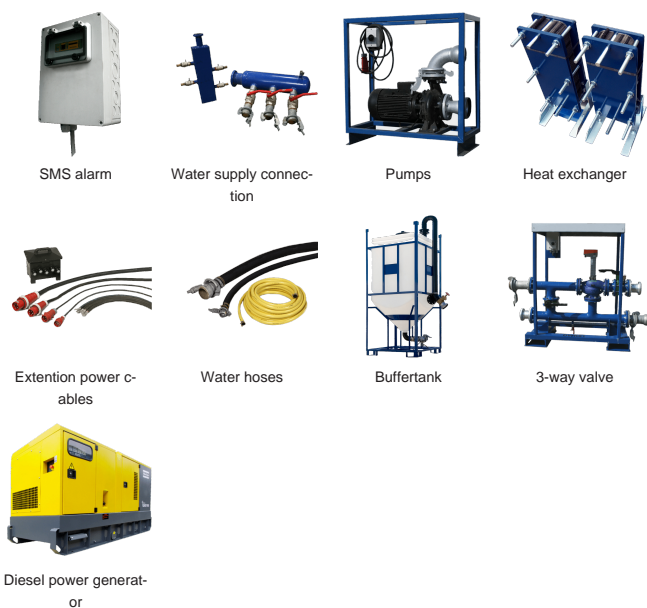

SMS alarm

Water supply connection

Pumps

Heat exchanger

Extension power cables

Water hoses

Buffertank

3-way valve

Diesel power generator

### Technical specifications CZ02

Cooling capacity <sup>1</sup>	26.5 kW
Power consumption	11.9 kW
Current (nominal)	21.9 A
Power connection	32 A CEE
Voltage	400 V
Recommended fuses	35 A
Phases	3 + N + E
Internal pump	No
Water connection	2? Bauer
Maximum working pressure	10 bar
Nominal pressure drop	37 kPa
Length	1550 mm
Width	1090 mm
Height	1630 mm
Weight	600 kg
Sound level (at 10 m)	47 dB(A)

<sup>1</sup> Conform specifications (cooling: water 12 °C/7 °C, air 35 °C)