




Chiller CZ05D

Air-cooled chiller with 50 kW cooling capacity. This low-energy low-noise machine is ready for use. The machine is mounted in a robust frame with a shock-resistant grid for condenser protection and can be moved easily with a fork-lift or crane.

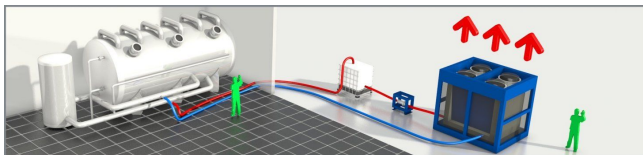

Standard accessories CZ05D




Robust frame

Water connection

Electrical power connection (A)

Optional accessories CZ05D

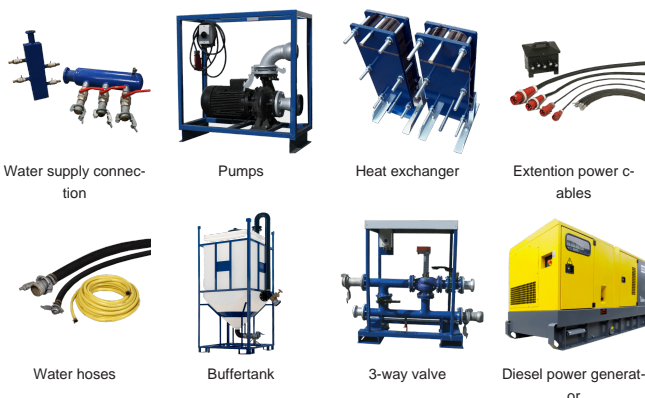

Water supply connection

Pumps

Heat exchanger

Extension power cables

Water hoses

Buffertank

3-way valve

Diesel power generator

Technical specifications CZ05D

Cooling capacity ¹	55.3 kW
Power consumption	24 kW
Current (nominal)	43 A
Power connection	63 A CEE
Voltage	400 V
Recommended fuses	63 A
Phases	3 + N + E
Internal pump	No
Water connection	2" Bauer
Maximum working pressure	10 bar
Nominal pressure drop	30 kPa
Length	2800 mm
Width	1200 mm
Height	1900 mm
Weight	916 kg
Sound level (at 10 m)	45 dB(A)

¹ Conform specifications (cooling: water 12 °C/7 °C, air 35 °C)