





Chiller CZ50i

Air-cooled chiller with 500 kW cooling capacity. This low-energy chiller is ready for use. The machine is mounted in a robust frame with a shock-resistant grid for condenser protection and can be moved easily with a crane.

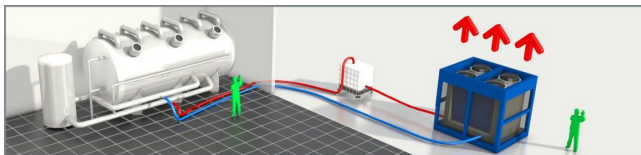

Standard accessories CZ50i

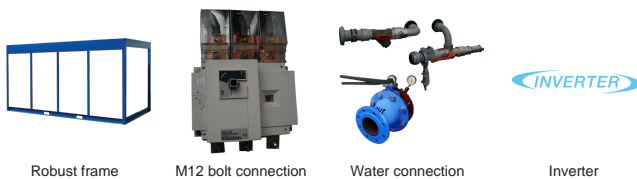


Robust frame

M12 bolt connection

Water connection

Inverter

Optional accessories CZ50i

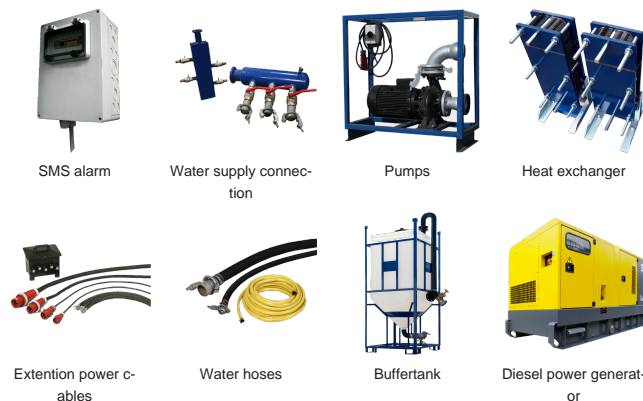

SMS alarm

Water supply connection

Pumps

Heat exchanger

Extension power cables

Water hoses

Buffertank

Diesel power generator

Technical specifications CZ50i

Cooling capacity ¹	499 kW
Power consumption	175 kW
Current (nominal)	296 A
Power connection	M12 bolt connection
Voltage	400 V
Recommended Fuses	400 A
Phases	3 + E
Internal pump	No
Water connection	4? Bauer
Maximum working pressure	16 bar
Nominal pressure drop	43.9 kPa
Length	5330 mm
Width	2450 mm
Height	2700 mm
Weight	6100 kg
Sound level (at 10 m)	58 dB(A)

¹ Conform specifications (cooling: water 12 °C/7 °C, air 35 °C)