




Chiller CH05

Air-cooled chiller with 50 kW cooling capacity, complete with internal water pump and buffer tank. This low-energy low-noise machine is ready for use. The machine is mounted in a robust frame with a shock-resistant grid for condenser protection and can be moved easily with a forklift or crane.

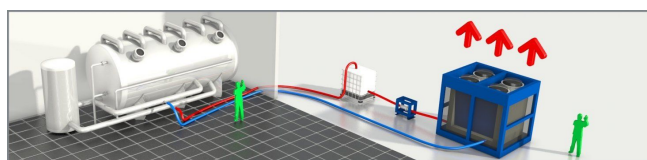

Standard accessories CH05



Robust frame

Water connection

Electrical power connection (A)

Optional accessories CH05



SMS alarm

Water supply connection

Pumps

Heat exchanger

Extension power cables

Water hoses

Buffertank

3-way valve



Diesel power generator

Technical specifications CH05

| | |
|-------------------------------|-----------|
| Cooling capacity ¹ | 50.7 kW |
| Power consumption | 17.4 kW |
| Current (nominal) | 38 A |
| Power connection | 63 A CEE |
| Recommended fuses | 63 A |
| Phases | 3 + N + E |
| Internal pump | Yes |
| Water connection | 2" Bauer |
| Maximum working pressure | 4 bar |
| Nominal pressure drop | 30 kPa |
| Length | 3260 mm |
| Width | 1280 mm |
| Height | 2260 mm |
| Weight | 1825 kg |
| Sound level (at 10 m) | 53 dB(A) |

¹ Conform specifications (cooling: water 12 °C/7 °C, air 35 °C)