




## Chiller CZ10T

Air-cooled chiller with 100 kW cooling capacity. This low-energy low-noise machine is ready for use. The machine is mounted in a robust frame with a shock-resistant grid for condenser protection and can be moved easily with a fork-lift or crane.

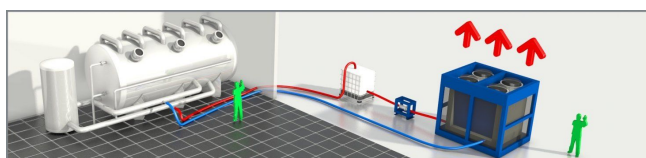


### Standard accessories CZ10T



Robust frame

Water connection

### Optional accessories CZ10T

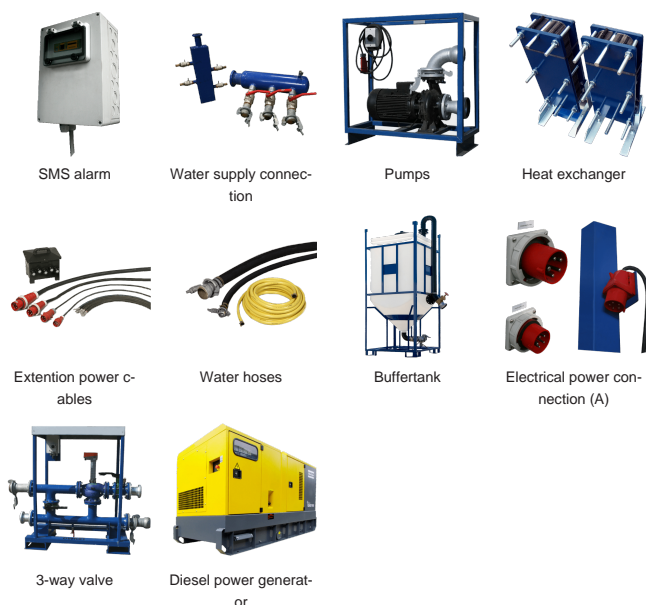

SMS alarm

Water supply connection

Pumps

Heat exchanger

Extension power cables

Water hoses

Buffertank

Electrical power connection (A)

3-way valve

Diesel power generator

### Technical specifications CZ10T

Cooling capacity <sup>1</sup>	102.8 kW
Power consumption	38.7 kW
Current (nominal)	69.9 A
Power connection	125 A CEE
Voltage	400 V
Recommended fuses	125 A
Phases	3 + E
Internal pump	No
Water connection	2" Bauer
Maximum working pressure	10 bar
Nominal pressure drop	45 kPa
Length	3730 mm
Width	1280 mm
Height	2270 mm
Weight	1775 kg
Sound level (at 10 m)	53 dB(A)

<sup>1</sup> Conform specifications (cooling: water 12 °C/7 °C, air 35 °C)